


PLAN VIEW

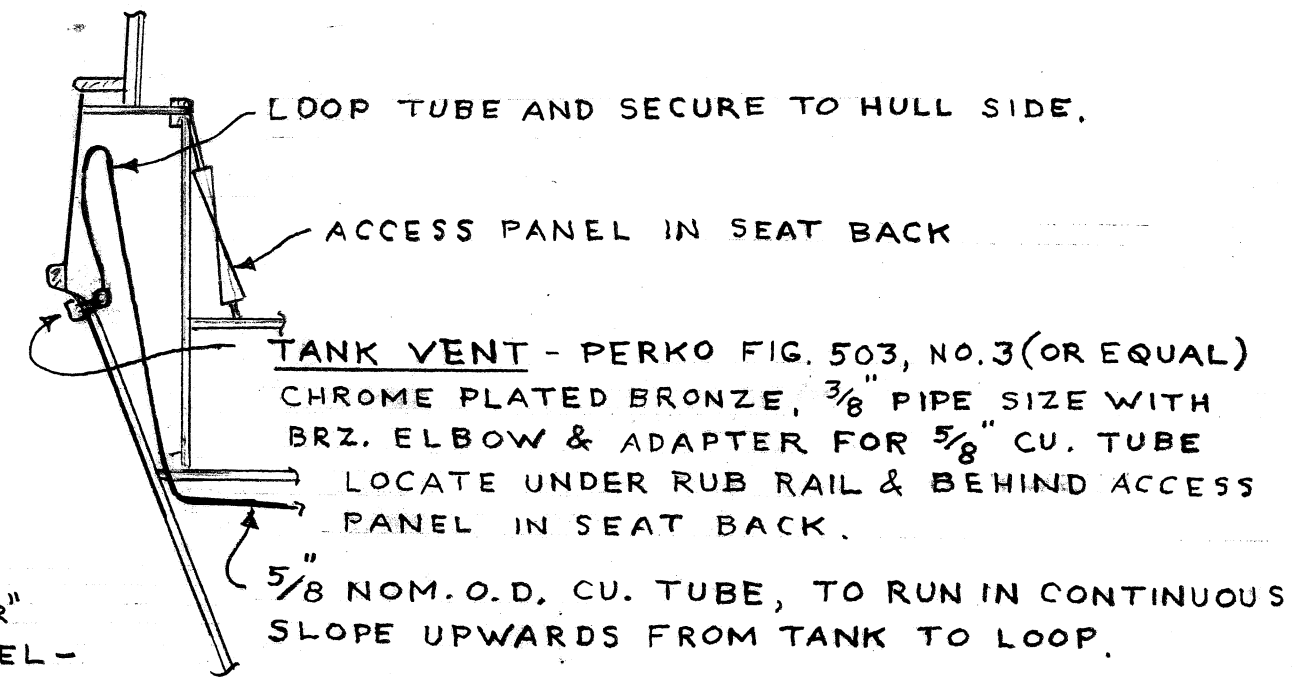

SECTION @ A-A, VENT DETAIL
SCALE: 3/4" = 1'-0"

GENERAL NOTES

- 1 FUEL PIPING TO BE SEAMLESS COPPER TUBE - .032" MIN. WALL THK.
- 2 FUEL HOSE AT ENGINE TO MEET THE REQUIREMENTS OF B.I.A. AND U.S.C.G. FOR ACCEPTABLE USE WHERE 2 1/2 MINUTE FIRE RESISTANCE IS REQUIRED.
- 3 FILL HOSE FOR 1 1/2" PIPE TO HAVE BONDING STRAP FROM FILL TO TANK.
- 4 PRIMARY FILTER TO BE FRAM DUAL PURPOSE UNIT EF-4. SECURE TO STRINGER OR BRACKET IN ACCESSIBLE LOCATION.
- 5 VALVES TO BE BRONZE PACKLESS DIAPHRAM TYPE KEROTEST OR EQUAL.
- 6 ALL PIPING TO BE WELL SECURED THROUGHOUT IT'S LENGTH WITH CLIPS OR STRAPS SPACED AT 14" MAX. INTERVALS.
- 7 A TANK LEVEL GAUGE, "TANK TENDER", 4-TANK UNIT IS TO BE INSTALLED NEAR ELEC. PANEL.

DIESEL OIL PIPING
MANATEE 36

DRAWING FOR CUSTOMER REFERENCE ONLY
Actual construction may vary.
Specifications and equipment subject to change.
Items indicated not necessarily provided.

SCALE: AS NOTED
DATE: 12/27/82